

# Edge AI Computer

# RVS-T2M


**Palm Size**  
145mm x 125 mm x 85.6 mm

**MXM GPU**  
TYPE A : 82 x 70 mm



Fit Anywhere and Everywhere

-40°C ~ 50°C with GPU

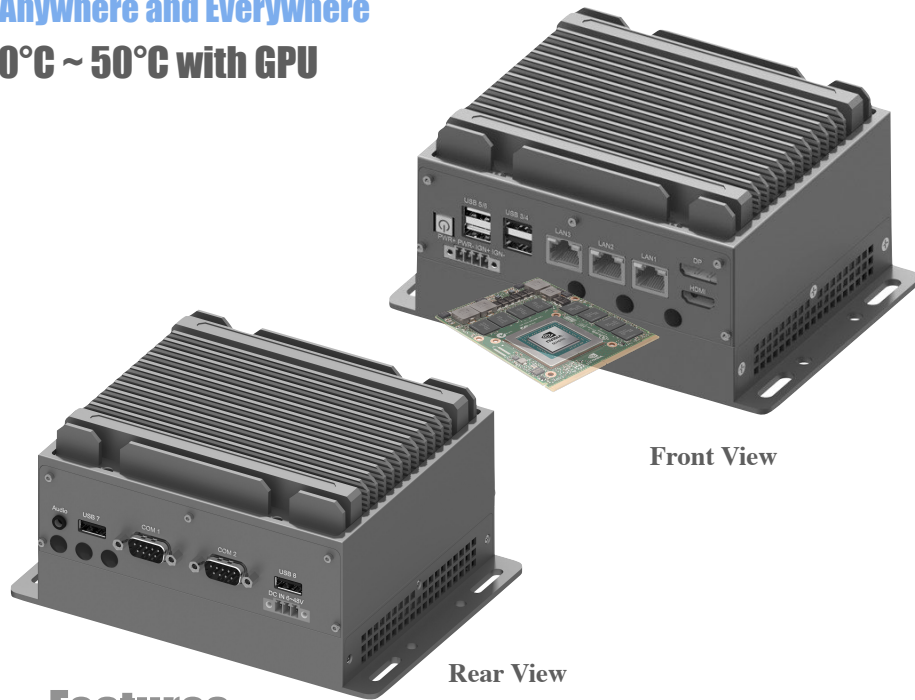

Front View

Rear View

## Features

- ✓ 3x 2.5GbE LAN
- ✓ 2x Displays (1x HDMI, 1x DP)
- ✓ 1x RS232/422/485, 1x RS232
- ✓ 6x USB ( Support 4x USB3)
- ✓ 1x Mic In/Line Out
- ✓ 2x M.2 2242 M key (SATA III SSD) , support Raid 0/1
- ✓ 1x M.2 2242/3052 B key with SIM slot, support 4G/5G
- ✓ 1x Full Size Mini-PCIe with SIM slot, support 4G/5G
- ✓ 1x M.2 Key E Type 2230 for WIFI/BT/GPS
- ✓ 6~48V Wide DC In Voltage Input,
- ✓ Ignition Power Control
- ✓ Remote Control

## SPECIFICATION

<b>Product Name</b>	RugCon-RVS-T2M
<b>Generation</b>	Intel® 13th/ 12th-Gen Core™ i7 /i5 /i3 (15W) , BGA CPU Onboard
<b>Memory</b>	Max. Capacity : 64GB DDR5 with 2x SO-DIMM
<b>Display</b>	2x Display 1x Display Port, 4096*2304@60Hz 1x HDMI , 4096*2160@60Hz
<b>LAN</b>	3x 2.5 GbE
<b>CAN</b>	N//A
<b>COM</b>	1x RS232/422/485, 1x RS232
<b>USB</b>	6x USB ( 4x USB 3.2, 2x USB 2.0)
<b>Audio</b>	1x 3.5mm jack for Mic-In and Line-out
<b>DIO</b>	N//A
<b>Storage</b>	2x M.2 2242 M key (SATA III SSD) , Support Raid 0/1 , (1x M.2 2242 share with M.2 3052)
<b>Internal Expansion</b>	1x M.2 2242/3052 M-B key with SIM slot, support 4G/5G 1x Full Size Mini-PCIe with SIM slot, support 4G/5G 1x M.2 Key E Type 2230 for WIFI/BT/GPS
<b>MXM Expansion</b>	Support TYPE A : 82 x 70 mm MXM GPU Module
<b>Mechanical</b>	Dimension : 145(W) x 125(D) x85.6 (H) mm , Weight : 1.1 Kg , Mounting : Wall Mount
<b>Temperature</b>	Operating Temperature : -40° C ~ 70 °C (According to CPU) , <b>GPU TGP 35W ( 50 °C )</b> Storage Temperature : -40°C to 85°C
<b>Humidity</b>	Operating : 0~95%(non-condensing) Storage : 10~90%
<b>Power</b>	1x 3-pin pluggable terminal block for 6~48V DC Input <b>200V/1ms Surge Protection, Reverse-Voltage, Over-Voltage, Under-Voltage, Over-Current Protection</b> 1x Power Button 1x 4-pin pluggable terminal block for Ignition/Remote power control
<b>Vibration / Shock</b>	Vibration test according to MIL-STD-810H, Method 514.8, Category 4 Shock test according to MIL-STD-810H, Method 516.8, Procedure I
<b>EMC</b>	CE/FCC Class A (E-Mark / EN50155 / EN45545-2 by request)

## Product Introduction

ENBIK RugCon-**RVS-T2M** is a ultra-mini palm-sized edge AI computer with only 145 x 125 x 83 mm size ideal for space-constrained setups. **RVS-T2M** combines low power consumption Intel® 13th/12th generation core™ 15W processor with high-performance AI computing ability which can effectively solve the problem of edge artificial intelligence deployment with limited power supply. **RVS-T2M** offers a wide range of I/O ports including 3x LAN (2.5GbE), 1x RS232/422/485, 1x RS232, 6x USB and Multiple M.2 internal expansion slots for 5G/4G/WIFI/GPS. **RVS-T2M** also has 2x M.2 2242 SATA III slots, which can install two SSD at the same time.

What is exciting is that the **RVS-T2M** can support MXM GPU of NVIDIA, which undoubtedly makes software developers more excited. The rich NVIDIA software ecosystem makes edge artificial intelligence deployment faster and easier to implement, effectively solves the installation and low-latency reasoning problems of various artificial intelligence models at the edge, and quickly makes various decisions and judgments at the edge. Modular GPU scalability ensures seamless upgrades to meet evolving application demands, the ENBIK's **RVS-T2M** is definitely the best choice for edge deployment of demanding artificial intelligence tasks, limited space and limited power in various edge applications.

## Product Application

ENBIK RugCon-**RVS-T2M** is suitable for edge computing, AIoT, machine vision, AGV/AMR, In-Vehicle systems, rail transit, robot control and automation control, as well as various harsh and extreme edge environments with limited installation space and limited power supply.

**ENBIK RugCon RVS-T2M**  
Super Small : 145 x 125 x 85 mm

**Intel CPU Support**  
It can be equipped with 15W Intel® 14th/13/12th generation Core™ low-power i7/i5/i3 processor.

**M.2 Expansion for 5G/4G/LTE/WIFI / GPS**  
1x Full Size Mini-PCle(PCle ,USB2) with SIM slot  
1x M.2 2242/3052 B key(SATAIII,PCIE) with SIM slot  
1x M.2 Key E Type 2230 (PCle, USB2)

**2 x M.2 2242 M key (SATA III SSD)**

**Ignition Control / Remote Control**

**4 xUSB(2x USB3.2 GEN1x1 5Gbps , 2x USB2.0)**

**3x RJ45 2.5 GbE**

**2x Display  
1x DP, 1x HDMI**

**Back**

**Mic In / Line Out**

**1x USB3.2 USB3.2 GEN1x1 5Gbps**

**2x COM support  
1x RS232/422/485 / 1x RS232**

**1x USB3.2 USB3.2 GEN1x1 5Gbps**



**6~48V DC INPUT / 180W**

**200V/1ms Surge Protection,  
Reverse-Voltage Protection  
Over-Voltage Protection  
Under-Voltage Protection  
Over-Current Protection**

**AI** **Edge AI Computing BOX**  
**MXM GPU**

**TYPEA**

**Dimension : Compact Slim : 145 mm x 125 mm x 85.6 mm**

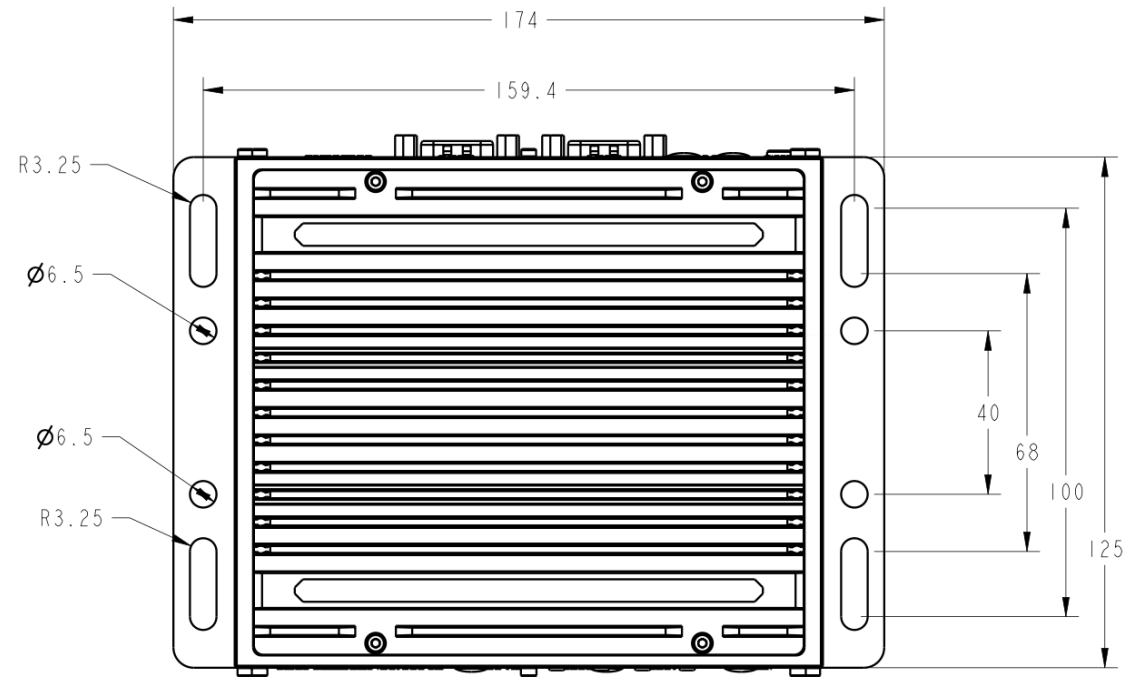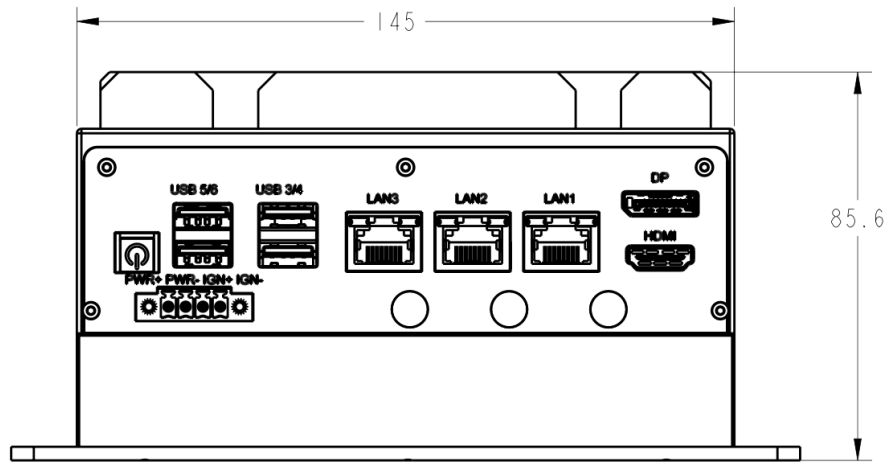

## CPU Support :

### Intel 12th CPU Support List

12th Gen Intel® Core™ mobile processors (formerly Alder Lake-P) , Commercial

CPU Module	Description
i5-1235U	Intel® Core™ i5-1235U processor with 2 P-cores and 8 E-cores up to 4.4GHz   12MB Intel® Smart Cache   Intel® Iris® Xe Graphics architecture with 80 EUs   Intel® code name Alder Lake-P (U-Series,15W)
i3-1215U	Intel® Core™ i3-1215U processor with 2 P-cores and 4 E-cores up to 4.4GHz   10MB Intel® Smart Cache   Intel® UHD Graphics 64EU   Intel® code name Alder Lake-P (U-Series,15W)

12th Gen Intel® Core™ mobile processors (formerly Alder Lake-P) , Industrial

CPU Module	Description
i5-1245UE	Intel® Core™ i5-1245UE processor with 2 P-cores and 8 E-cores up to 4.4GHz   12MB Intel® Smart Cache   Intel® Iris® Xe Graphics architecture with 80 EUs   Intel® code name Alder Lake-P (U-Series,15W)
i3-1215UE	Intel® Core™ i3-1215UE processor with 2 P-cores and 4 E-cores up to 4.4GHz   10MB Intel® Smart Cache   Intel® UHD Graphics 64EU   Intel® code name Alder Lake-P (U-Series,15W)

### Intel 13th CPU Support List

13th Gen Intel® Core™ mobile processors (formerly Raptor Lake-P) , Commercial

CPU Module	Description
i5-1335U	Intel® Core™ i5-1335U processor with 2 P-cores and 8 E-cores up to 4.6GHz   12MB Intel® Smart Cache   Intel® Iris® Xe Graphics architecture with 80 EUs   Intel® code name Raptor Lake-P (U-Series,15W)
i3-1315U	Intel® Core™ i3-1315U processor with 2 P-cores and 4 E-cores up to 4.5GHz   10MB Intel® Smart Cache   Intel® UHD Graphics 64EU   Intel® code name Raptor Lake-P (U-Series,15W)

13th Gen Intel® Core™ mobile processors (formerly Raptor Lake-P) , Industrial

CPU Module	Description
i5-1335UE	Intel® Core™ i5-1335UE processor with 2 P-cores and 8 E-cores up to 4.5GHz   12MB Intel® Smart Cache   Intel® Iris® Xe Graphics architecture with 80 EUs   Intel® code name Raptor Lake-P (U-Series,15W)
i3-1315UE	Intel® Core™ i3-1315UE processor with 2 P-cores and 4 E-cores up to 4.5GHz   10MB Intel® Smart Cache   Intel® UHD Graphics 64EU   Intel® code name Raptor Lake-P (U-Series,15W)

**Note 1 : Embedded or other Processors also be supported , please contact our sales channel .**

## Select the power of artificial intelligence

	GeForce RTX Series		QUADRO
AI Chip	RTX4050-6G	MX550	A2000-8G
Generation	Ada Generation	Turing	Ampere
Chip Clock	<b>1140MHz (Boost 1605MHz)</b>	<b>1260MHz (Boost 1500MHz)</b>	<b>1087MHz(Boost 1552MHz)</b>
Memory	6GB GDDR6 96bit	4GB GDDR6 64bit	GDDR6 8 GB 128bit
Memory Clock	2000 MHz	1500 MHz	1375 MHz
Memory Bandwidth	<b>192.0 GB/s</b>	<b>96 GB/s</b>	<b>176.0 GB/s</b>
Single Precision	<b>8.218 TFLOPS</b>	<b>4.5 TFLOPS</b>	<b>8.958 TFLOPS</b>
TOPS	194	-	-
CUDA	2560	1024	2560
Tensor Core	80	32	80
RT core	20	16	20
TGP	<b>35W</b>	<b>35W</b>	<b>38W/50W</b>
Dimension	TYPE A : 82 x 70 mm	TYPE A : 82 x 70 mm	TYPE A : 82 x 70 mm

**Note 2 : Embedded or other MXM GPU Module also be supported , please contact our sales channel .**