

Rugged Edge Computer

RugCon RVS-T2

Super Mini & Palm Size : 145 mm x 125 mm x 60 mm

Wide DC INPUT 6V~48V

Equipped with the latest Intel® 12th/13th generation Core i processor (U_15W), 3 2.5GbE Ports / 6 USB / 2 Display / 2 COM / Dual M.2 SSD / 5G / WIFI and vehicle ignition power control / remote power control

Fit Anywhere and Everywhere

-40°C ~ 70°C



RVS-T1

Features


- ✓ 3x 2.5GbE
- ✓ 2x Displays (1x HDMI, 1x DP)
- ✓ 1x RS232/422/485, 1x RS232
- ✓ 6x USB (Support 4x USB3)
- ✓ 1x Mic In/Line Out
- ✓ 2x M.2 2242 M key (SATA III SSD) , support Raid 0/1
- ✓ 1x M.2 2242/3052 B key with SIM slot, support 4G/5G
- ✓ 1x Full Size Mini-PCIe with SIM slot, support 4G/5G
- ✓ 1x M.2 Key E Type 2230 for WIFI/BT/GPS
- ✓ 6~48V Wide DC In Voltage Input,
- ✓ Ignition Power Control
- ✓ Remote Control

SPECIFICATION

Product Name	RugCon-RVS-T2
Generation	Intel® 13th/ 12th-Gen Core™ i7 /i5 /i3 (U_15W)
Memory	Max. Capacity : 64GB DDR5 with 2x SO-DIMM
Display	2x Display 1x Display Port, 4096*2304@60Hz 1x HDMI , 4096*2160@60Hz
LAN	3x 2.5 GbE
CAN	N//A
COM	1x RS232/422/485, 1x RS232
USB	6x USB (4x USB 3.2, 2x USB 2.0)
Audio	1x 3.5mm jack for Mic-In and Line-out
DIO	N//A
Storage	2x M.2 2242 M key (SATA III SSD) , Support Raid 0/1 , (1x M.2 2242 share with M.2 3052)
Internal Expansion	1x M.2 2242/3052 M-B key with SIM slot, support 4G/5G 1x Full Size Mini-PCIe with SIM slot, support 4G/5G 1x M.2 Key E Type 2230 for WIFI/BT/GPS
Mechanical	Dimension : 145(W) x 125(D) x60(H) mm , Weight : 1.1 Kg , Mounting : Wall Mount
Temperature	Operating :Standard : -40° C~70 °C (According to CPU) Storage Temperature : -40°C to 85°C
Humidity	Operating : 0~95%(non-condensing) Storage : 10~90%
Power	1x 3-pin pluggable terminal block for 6-48V DC Input 200V/1ms Surge Protection, Reverse-Voltage, Over-Voltage, Under-Voltage, Over-Current Protection 1x Power Button 1x 4-pin pluggable terminal block for Ignition/Remote
Vibration / Shock	Vibration test according to MIL-STD-810H, Method 514.8, Category 4 Shock test according to MIL-STD-810H, Method 516.8, Procedure I
EMC	CE/FCC Class A , according to EN 55032 & EN 55035 , (E-Mark / EN50155 / EN45545-2 by request)

Intel CPU Support
 It can be equipped with 15W Intel® 14th/13/12th generation Core™ low-power i7/i5/i3 processor.

ENBIK
 RugCon **RVS-T2**
 Super Small : 145 x 125 x 60 mm

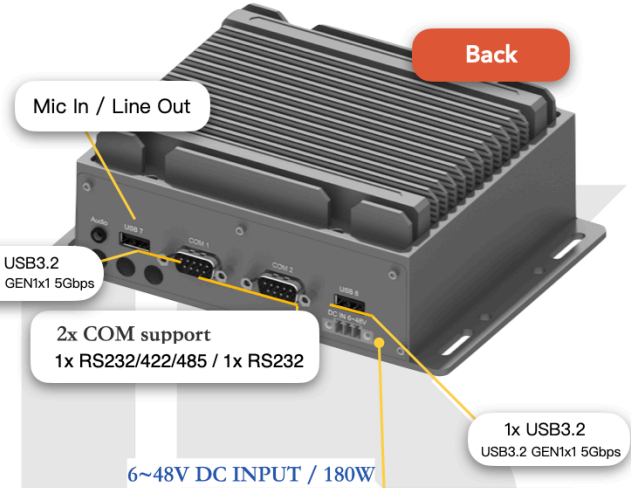

2 x M.2 2242 M key (SATA III SSD)

M.2 Expansion for 5G/4G/LTE/WIFI / GPS
 1x Full Size Mini-PCle(PCle ,USB2) with SIM slot
 1x M.2 2242/3052 B key(SATAIII,PCIe) with SIM slot
 1x M.2 Key E Type 2230 (PCIe, USB2)

Ignition Control / Remote Control


4 xUSB(2x USB3.2 GEN1x1 5Gbps , 2x USB2.0)

3x RJ45 2.5 GbE

2x Display 1x DP, 1x HDMI

200V/1ms Surge Protection,
 Reverse-Voltage Protection
 Over-Voltage Protection
 Under-Voltage Protection
 Over-Current Protection


Performance

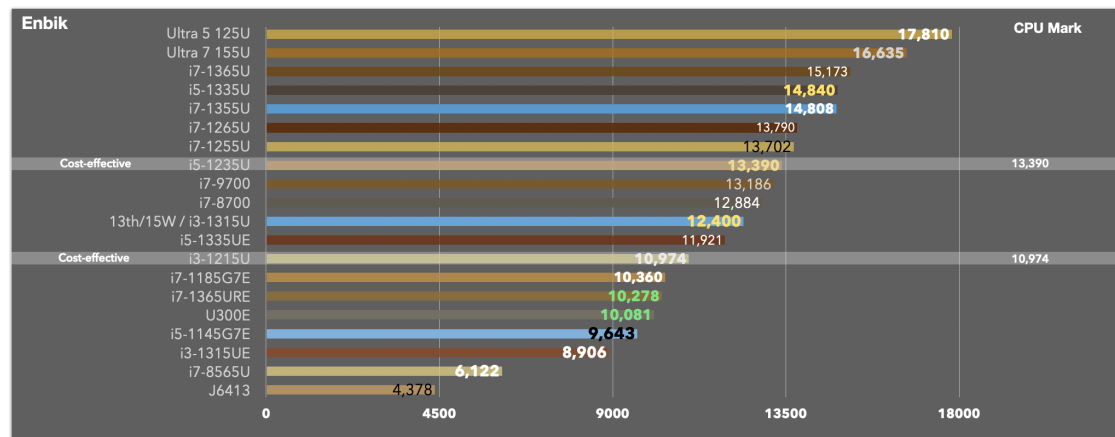



Dimension :

Compact Slim : 145 mm x 125 mm x 60 mm

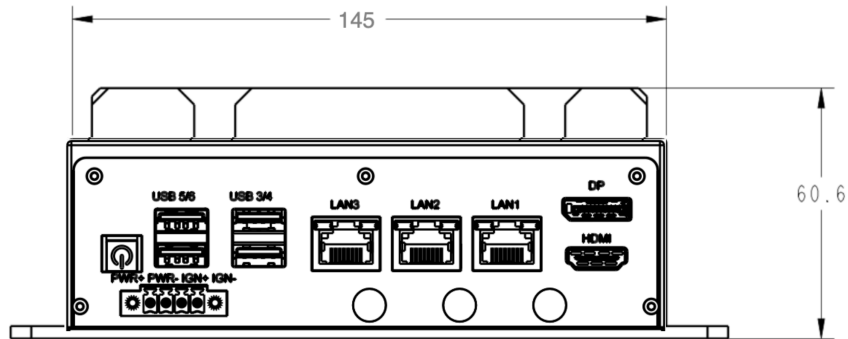

CPU Support :


Intel 12th CPU Support List

12th Gen Intel® Core™ mobile processors (formerly Alder Lake-P) , Commercial

CPU Module	Description
i5-1235U	Intel® Core™ i5-1235U processor with 2 P-cores and 8 E-cores up to 4.4GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Alder Lake-P (U-Series,15W)
i3-1215U	Intel® Core™ i3-1215U processor with 2 P-cores and 4 E-cores up to 4.4GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Alder Lake-P (U-Series,15W)

12th Gen Intel® Core™ mobile processors (formerly Alder Lake-P) , Industrial

CPU Module	Description
i5-1245UE	Intel® Core™ i5-1245UE processor with 2 P-cores and 8 E-cores up to 4.4GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Alder Lake-P (U-Series,15W)
i3-1215UE	Intel® Core™ i3-1215UE processor with 2 P-cores and 4 E-cores up to 4.4GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Alder Lake-P (U-Series,15W)

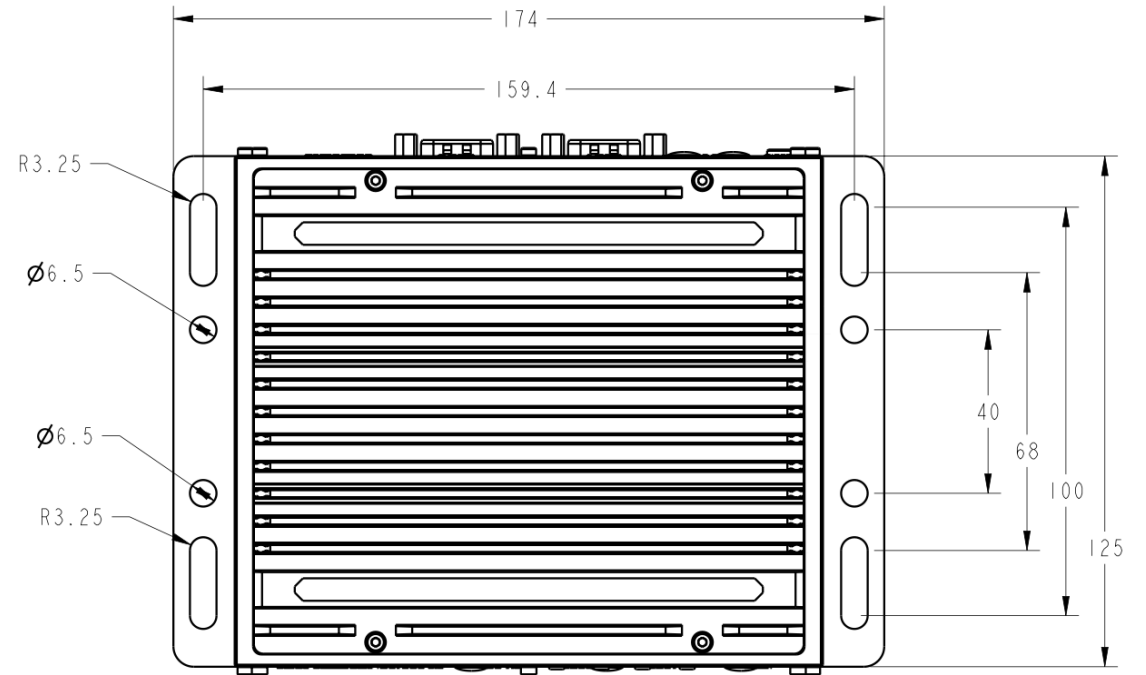

Intel 13th CPU Support List

13th Gen Intel® Core™ mobile processors (formerly Raptor Lake-P) , Commercial

CPU Module	Description
i5-1335U	Intel® Core™ i5-1335U processor with 2 P-cores and 8 E-cores up to 4.6GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Raptor Lake-P (U-Series,15W)
i3-1315U	Intel® Core™ i3-1315U processor with 2 P-cores and 4 E-cores up to 4.5GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Raptor Lake-P (U-Series,15W)

13th Gen Intel® Core™ mobile processors (formerly Raptor Lake-P) , Industrial

CPU Module	Description
i5-1335UE	Intel® Core™ i5-1335UE processor with 2 P-cores and 8 E-cores up to 4.5GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Raptor Lake-P (U-Series,15W)
i3-1315UE	Intel® Core™ i3-1315UE processor with 2 P-cores and 4 E-cores up to 4.5GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Raptor Lake-P (U-Series,15W)